



COUNTERTOP DOUBLE BURNER (HOB) COOKTOP

Side-to-Side with Standard Controls



PERFORMANCE

The CookTek® Countertop Double Burner (Hob) Cooktop with Standard Controls is a portable countertop design with stainless steel housing and a glass-ceramic cooktop intended for use in commercial kitchens and restaurants. An automatic shut-off feature, integral cooling fan, and self-diagnosing microprocessor allow for a safe kitchen environment. Each unit is equipped with 22 temperature settings and 20 power cook settings to ensure maximum and efficient heating of any induction-compatible pan.*

Project _____

Item No. _____

Quantity _____

FEATURES

- Models available in 5,000 (2,500/burner); 6,000 (3,000/burner); 7,000 (3,500/burner) watts
- Portable design with stainless steel housing
- Easy-to-clean high-temperature glass-ceramic top
- High-quality internal electronics and heavy gauge Litz wire
- Individual controls for each burner (hob) for independent operation and functionality
- LED display
- Automatic pan detection allows for instant energy transmission to pan
- Even heat distribution across bottom of cookware
- Programmed with 22 temperature settings and 20 power cook settings
- Automatic shut-off feature prohibits overheating
- Temperature range from 85°F–500°F (29°C–260°C)
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Integral fan keeps internal components cool
- Available in 200–240 VAC, single phase
- Includes plug and cord (6 ft. nominal)
- Two-year advanced replacement warranty – U.S. and Canada



CERTIFICATIONS



*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

COUNTERTOP DOUBLE BURNER (HOB) COOKTOP

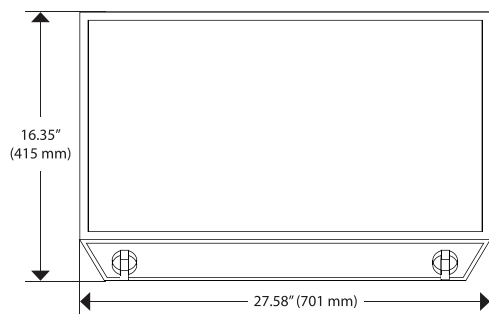

DIMENSIONS			
Full Unit Height		4.98"	126 mm
Housing Height		3.75"	95 mm
Full Unit Width		27.58"	701 mm
Full Unit Depth		16.35"	415 mm
Feet Height		1.25"	32 mm
Weight		31 lb.	14.0 kg
Max Ambient Temperature		122°F	50°C
WALL CLEARANCE			
Front		2"	51 mm
Sides		2"	51 mm
Rear		2"	51 mm
SHIPPING INFORMATION			
Packaged Height		11"	279 mm
Packaged Width		32"	813 mm
Packaged Depth		23"	584 mm
Packaged Weight		45 lb.	20.4 kg
Item Class		250 NMFC #26710	
ELECTRICAL SPECIFICATIONS (SINGLE PHASE)			
UNITED STATES/CANADA			
MC2502S	601801	200–240 V, 50/60 Hz, 22 A, 5,000 (100–2,500 W/burner)	NEMA 6-30P
MC3002S	604501	200–240 V, 50/60 Hz, 26 A, 6,000W (100–3,000 W/burner)	NEMA 6-50P
MC3502S	604601	200–240 V, 50/60 Hz, 30 A, 7,000 (100–3,500 W/burner)	NEMA 6-50P
UK AND SAUDI ARABIA			
MC2502S	601802	200–240 V, 50/60 Hz, 22 A, 5,000 (100–2,500 W/burner)	IEC 309, 32A, 3-pin
MC3002S	604502	200–240 V, 50/60 Hz, 26 A, 6,000W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
MC3502S	604602	200–240 V, 50/60 Hz, 30 A, 7,000 (100–3,500 W/burner)	IEC 309, 32A, 3-pin
INTERNATIONAL			
MC2502S	601803	200–240 V, 50/60 Hz, 22 A, 5,000 (100–2,500 W/burner)	IEC 309, 32A, 3-pin
MC3002S	604503	200–240 V, 50/60 Hz, 26 A, 6,000W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
MC3502S	604603	200–240 V, 50/60 Hz, 30 A, 7,000 (100–3,500 W/burner)	IEC 309, 32A, 3-pin
AUSTRALIA			
MC2502S	601804	200–240 V, 50/60 Hz, 22 A, 5,000 (100–2,500 W/burner)	56PA332, 32A, 250V
MC3002S	604504	200–240 V, 50/60 Hz, 26 A, 6,000W (100–3,000 W/burner)	56PA332, 32A, 250V
MC3502S	604604	200–240 V, 50/60 Hz, 30 A, 7,000 (100–3,500 W/burner)	56PA332, 32A, 250V

SOUTH AFRICA			
MC2502S	601807	200–240 V, 50/60 Hz, 22 A, 5,000 (100–2,500 W/burner)	N/A
MC3002S	604507	200–240 V, 50/60 Hz, 26 A, 6,000W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
MC3502S	604607	200–240 V, 50/60 Hz, 30 A, 7,000 (100–3,500 W/burner)	IEC 309, 32A, 3-pin
ISRAEL			
MC2502S	601808	200–240 V, 50/60 Hz, 22 A, 5,000 (100–2,500 W/burner)	IEC 309, 32A, 3-pin
MC3002S	604508	200–240 V, 50/60 Hz, 26 A, 6,000W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
MC3502S	604608	200–240 V, 50/60 Hz, 30 A, 7,000 (100–3,500 W/burner)	IEC 309, 32A, 3-pin

Dedicated circuit required for each installation.



NEMA 6-30P



IEC 309, 32A, 3-pin



NEMA 6-50P



56PA332, 32A, 250V

UK & Ireland Distributor



MCS Technical Products Ltd
Swindon, SN5 7YT, UK
+44 (0)1793 538308
sales@mcstechproducts.co.uk
www.mcstechproducts.co.uk

Global Operations

2801 Trade Center Drive / Carrollton, Texas 75007 USA
 US: 800.90TURBO (800.908.8726) / International: +1 214.379.6000
 Fax: +1 214.379.6073 / www.cooktek.com