

## Fry Top with indirect heating

DATASHEET

Length (mm): 400 Depth (mm): 700 Height (mm): 250/460 Net weight (kg): 55,5 Packed unit weight (kg): 75,5 Pallets size (mm): 800x500x710

Electrical power (kW): 2,7 kW Electrical connection: 400V 3N 50-60 Hz Phase: 4,1 A Alternative electrical connection: 230V 50-60 Hz Phase: 12,27 A

Cooking surface: - mod G4070L1C: flat - mod G4070T1C: ribbed made of stainless steel thickness 10 mm with lateral edges and scotch brite back finish. Available cooking surface L= 394 mm D= 460 mm Front dripping tray easily removable and washable Auto supporting structure completely made in stainless steel AISI 304, visible parts with scotch brite finish.

Adjustable plastic feet.


Heating made by resistances immerged in diathermic fluid inside a tank with expansion tank and safety valve.

Switch on/off button, cooking temperature control from 20°C to 260°C degrees by electronic thermostat.

Limit control with manual reset.

Accessories included: power cable, palette knife and kitchen scraper for cleaning. Protection degree IPX4.

CE Certification.

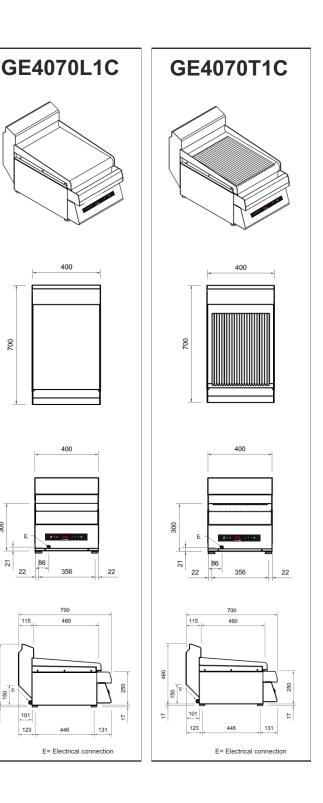



**GRUPPO ZERNIKE s.r.l.** via del Progresso, 15 47039 San Mauro Pascoli (FC) Italy Tel. +39 0541.810270-Fax +39 0541.937456 info@zernike.it - www.zernike.it

008

460

17

150



**UK and Ireland Distributor** MCS Technical Products Building 2 Westmead Industrial Estate Westmead Drive, Swindon, SN5 7YT Tel. +44 01793 538308 Fax +44 01793 522324 sales@mcstechproducts.co.uk www.mcstechproducts.co.uk