

Fry Top with indirect heating

DATASHEET

Length (mm): 400 Depth (mm): 900 Height (mm): 250/460 Net weight (kg): 58,5 Packed unit weight (kg)

Packed unit weight (kg): 82,5 Pallets size (mm): 1000x500x710

Electrical power (kW): 3,6 kW

Electrical connection: 400V 3N 50-60 Hz

Phase: 5,47 A

Cooking surface:

- mod FG4090L1C: flat - mod FG4090T1C: ribbed

made of stainless steel thickness 10 mm with lateral edges and scotch brite back finish.

Available cooking surface L= 394 mm D= 620 mm Front dripping tray easily removable and washable Auto supporting structure completely made in stainless steel AISI 304, visible parts with scotch brite finish.

Adjustable plastic feet.

Heating made by resistances immerged in diathermic fluid inside a tank with expansion tank and safety valve.


Switch on/off button, cooking temperature control from 20°C to 260°C degrees by electronic thermostat.


Limit control with manual reset.

Accessories included: power cable, palette knife and kitchen scraper for cleaning.

Protection degree IPX4.

CE Certification.

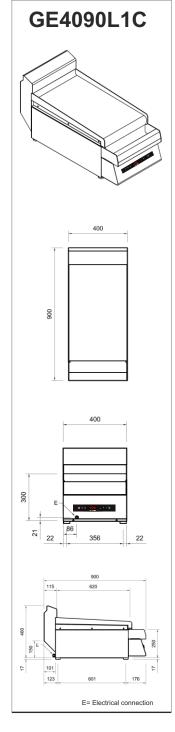

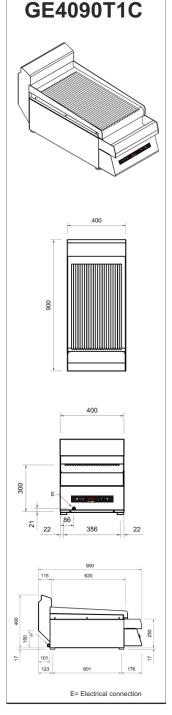



| GRUPPO ZERNIKE s.r.l. via del Progresso, 15 47039 San Mauro Pascoli (FC) Italy Tel. +39 0541.810270-Fax +39 0541.937456 info@zernike.it - www.zernike.it

