



COUNTERTOP DOUBLE BURNER (HOB) COOKTOP with Apogee™ Controls



PERFORMANCE

The CookTek® Countertop Double Burner (Hob) Cooktop with Apogee™ Controls is a portable design with stainless steel housing and a glass-ceramic top intended for commercial kitchens and restaurants. An automatic shut-off feature, integral cooling fan, and self-diagnosing microprocessor allow for a safe kitchen environment. Each unit is equipped with 100 power cook and temperature settings to ensure maximum and efficient heating of any induction-compatible pan.*

Project _____

Item No. _____

Quantity _____

FEATURES

- Models available in 5,000 (2,500/burner); 6,000 (3,000/burner); 7,000 (3,500/burner) watts
- Portable design with stainless steel housing
- Touch controls with LCD panel
- Easy-to-clean high-temperature glass-ceramic top
- High-quality internal electronics and heavy gauge Litz wire
- Individual controls for each burner (hob) for independent operation and functionality
- Built-in cook timer
- Automatic pan detection allows for instant energy transmission to pan
- Lock feature prevents unwanted setting changes
- Programmed with 100 power cook and temperature settings
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Integral fan keeps internal components cool
- Available in 200–240 VAC, single phase
- Includes plug and cord (6 ft. nominal)
- Two-year advanced replacement warranty – U.S. and Canada


CERTIFICATIONS



*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

COUNTERTOP DOUBLE BURNER (HOB) COOKTOP

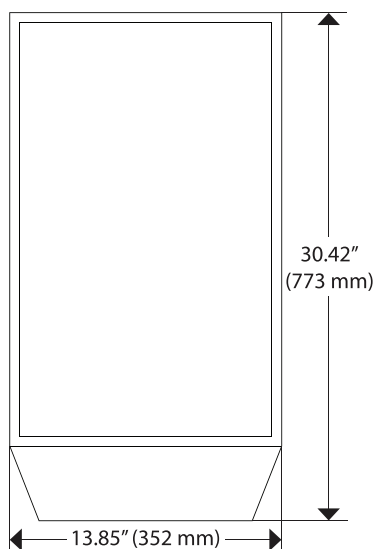

DIMENSIONS		
Full Unit Height	4.98"	126 mm
Housing Height	3.73"	95 mm
Full Unit Width	13.85"	352 mm
Full Unit Depth	30.42"	773 mm
Weight	31.2 lb.	14.2 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
SHIPPING INFORMATION		
Packaged Height	12"	305 mm
Packaged Width	18"	457 mm
Packaged Depth	36"	914 mm
Packaged Weight	45 lb.	20.4 kg
Item Class	250 NMFC #26710	



NEMA 6-30P



NEMA 6-50P



IEC 309, 32A, 3-pin



56PA332, 32A, 250V

ELECTRICAL SPECIFICATIONS (SINGLE PHASE)				
UNITED STATES/CANADA (per burner)				
MC2502FG	620501	200–240 V, 50/60 Hz, 22 A, 100–2500 W	NEMA 6-30P	
MC3002FG	620601	200–240 V, 50/60 Hz, 26 A, 100–3000 W	NEMA 6-50P	
MC3502FG	620701	200–240 V, 50/60 Hz, 30 A, 100–3500 W	NEMA 6-50P	
UK AND SAUDI ARABIA (per burner)				
MC2502FG	620502	200–240 V, 50/60 Hz, 22 A, 100–2500 W	IEC 309, 32A, 3-pin	
MC3002FG	620602	200–240 V, 50/60 Hz, 26 A, 100–3000 W	IEC 309, 32A, 3-pin	
MC3502FG	620702	200–240 V, 50/60 Hz, 30 A, 100–3500 W	IEC 309, 32A, 3-pin	
INTERNATIONAL (per burner)				
MC2502FG	620503	200–240 V, 50/60 Hz, 22 A, 100–2500 W	IEC 309, 32A, 3-pin	
MC3002FG	620603	200–240 V, 50/60 Hz, 26 A, 100–3000 W	IEC 309, 32A, 3-pin	
MC3502FG	620703	200–240 V, 50/60 Hz, 30 A, 100–3500 W	IEC 309, 32A, 3-pin	
AUSTRALIA (per burner)				
MC2502FG	620504	200–240 V, 50/60 Hz, 22 A, 100–2500 W	56PA332, 32A, 250V	
MC3002FG	620604	200–240 V, 50/60 Hz, 26 A, 100–3000 W	56PA332, 32A, 250V	
MC3502FG	620704	200–240 V, 50/60 Hz, 30 A, 100–3500 W	56PA332, 32A, 250V	
SOUTH AFRICA (per burner)				
MC2502FG	620507	200–240 V, 50/60 Hz, 22 A, 100–2500 W	-	
MC3002FG	620607	200–240 V, 50/60 Hz, 26 A, 100–3000 W	IEC 309, 32A, 3-pin	
MC3502FG	620707	200–240 V, 50/60 Hz, 30 A, 100–3500 W	IEC 309, 32A, 3-pin	
ISRAEL (per burner)				
MC2502FG	620508	200–240 V, 50/60 Hz, 22 A, 100–2500 W	IEC 309, 32A, 3-pin	
MC3002FG	620608	200–240 V, 50/60 Hz, 26 A, 100–3000 W	IEC 309, 32A, 3-pin	
MC3502FG	620708	200–240 V, 50/60 Hz, 30 A, 100–3500 W	IEC 309, 32A, 3-pin	



Dedicated circuit required for each installation.

Global Operations

2801 Trade Center Drive / Carrollton, Texas 75007 USA
International: +1 214.379.6000 www.cooktek.com

UK & Ireland Distributor



MCS Technical Products Ltd

Swindon, SN5 7YT, UK

+44 (0)1793 538308

sales@mcstechproducts.co.uk www.mcstechproducts.co.uk